


4168

8192x8-Bit dynamisches R
 8192x8-Bit dynamic RAM · 8192x8-Bit dynamique
 8192x8-Bit RAM dinamico · 8192x8-Bit dinámica

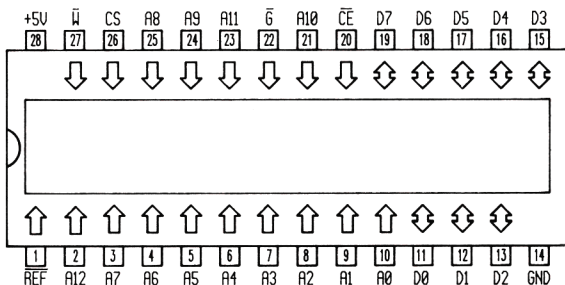

IMS 2360P

4168	Herst. Manuf. Fabr. Prod. Fabr.	Gehäuse Case Boîtier Carcassa Cápsula	Techn. Techn. Tecn. Tecn.	T _U C	P _{typ} mW	P standby mW	t _{aa} ns	t _{ref} ms	Ausgang Output Sortie Uscita Salida
					\$mW/bit				
MN 4364-15	Mat	28-DIP	NMOS	0...+70	<330	<44	<150	<2	TTL-TS
μPD 4168 C-15	Nip	28-DIP	NMOS	0...+70	<330	27,5	<150	<2	TTL-TS
μPD 4168 C-20	Nip	28-DIP	NMOS	0...+70	<303	27,5	<200	<2	TTL-TS
μPD 4168 C-25	Nip	28-DIP	NMOS	0...+70	<275	27,5	<250	<2	TTL-TS
aka: IMS2630P D2187A	Inmos Intel	28-DIP 28-DIP	NMOS NMOS						